

Technical Data Sheet

Revision Date	14 February 2019	
Multisorb Part Number	Product Name	Description
02-50053CG01	DesiMax® Heat Sealed Label	Self-Adhesive Desiccant

MATERIALS OF CONSTRUCTION

Components	Top film is a multi-layer permeable material, reverse printed	Heat sealable base film with adhesives onto a PET liner that has “normal” release characteristics for routine application with most labeling equipment	The reactant is 4A Molecular Sieve
-------------------	---	--	------------------------------------

PHYSICAL ATTRIBUTES


Attribute	Specification	Comments
Sorbent weight	Minimum 0.125 g	N/A
Length	1.75” ± 0.03”	44.45mm ± 0.76mm
Width	1.50” ± 0.03”	38.10mm ± 0.876mm
Moisture content	9 % maximum	4 hours at 500° C
Printing	Blue print	DesiMax print

PACKAGING, LABELING, PRODUCT STORAGE, AND WARRANTY PERIOD

Attribute	Specification	Comments
Quantity	2,500 pcs/spool 4 spool/case	Total: 10,000 pcs/case
Spool Dimensions	14.0-inch OD	Spool Fits on a 3” (76.2mm) core holder
Labeling	Manufacturer’s name, description of product, quantity per container, manufacturer’s part number, and manufacturer’s control number.	
Product Storage	Cool Dry Location (25°C/60%RH or lower recommended for long-term storage)	
Warranty Period	Product meets specified physical attributes for a minimum of 1 year from date of manufacture when stored in original unopened packaging	

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

DesiMax® General Dimensions
Refer to page 1 for current specifications

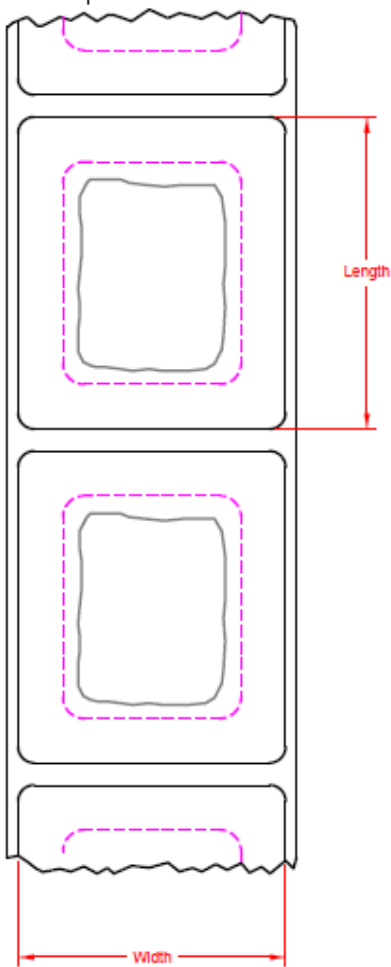

NOTE: Color may not be exactly as shown.

EXCEPT TO THE EXTENT REQUIRED BY STATE LAW, SELLER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.