

SPERIAN WHITING + DAVIS - GLOVES

PRODUCT INFORMATION

Sizes	Part #	Strap Color	Glove Weight (lbs)	UPC
XSmall	A515XS D	Gray	.445	801462012804
Small	A515S D	White	.493	801462012705
Medium	A515M D	Red	.555	801462012651
Large	A515L D	Blue	.581	801462012606
XLarge	A515XL D	Green	.609	801462012750

*Other sizes are available upon request

Stainless Steel Ring Data

SS Material	316
Wire Diameter	.0197 inches
Ring Outside Diameter	.157 inches
Ring Inside Diameter	.118 inches

TESTING INFORMATION

Whiting + Davis products are not CE certified, but are manufactured following the European Standard of EN1082; section 6.4.1 states:

“Smoothly and progressively apply a force that pulls the rings apart as it rises from 0 N to 100 N (22½ pounds of force) over a period of 2 to 10 seconds. Report all instances of rings or plates opening or breaking at a force of below 100 N.”

*N(Newton) = .225 pounds of force

Whiting+ Davis products, and Whiting + Davis products manufactured by Chainex have always exceeded the European Standard.

PRODUCT FEATURES

- Five finger mesh glove, side cuff slit for easy donning and doffing of glove
- Individually welded stainless steel rings
- Gloves are 4-ring joined at the seams to prevent gaps an knife sticks
- Thumbs are attached with 3 ring join, for the strongest seam at a high wear area
- Ergonomic design is comfortable to wear and diminishes sagging mesh
- Gloves are ambidextrous following the 3 Step Reversible Design

REPAIR SERVICE


The use of gloves and aprons in extreme working conditions may occasionally require the need for repairs due to worn or broken rings or straps. A dedicated workshop for repair that can help extend the life of our products is located at the Whiting + Davis facility. Choosing Whiting + Davis as your repair center will decrease the risk of faulty rings due to improper repair. Each mesh glove or garment will be refurbished to “like new” quality. Contact your Distributor for details.



THREE STEP REVERSIBLE DESIGN

- Step 1** Slide the buckle off the strap.
- Step 2** Insert hand into glove. As you remove your hand from the glove, pull on the fingers to turn the glove inside out (using a “shaking” motion after removing your hand).
- Step 3** Slide the buckle back on the strap.

GLOVE SIZING

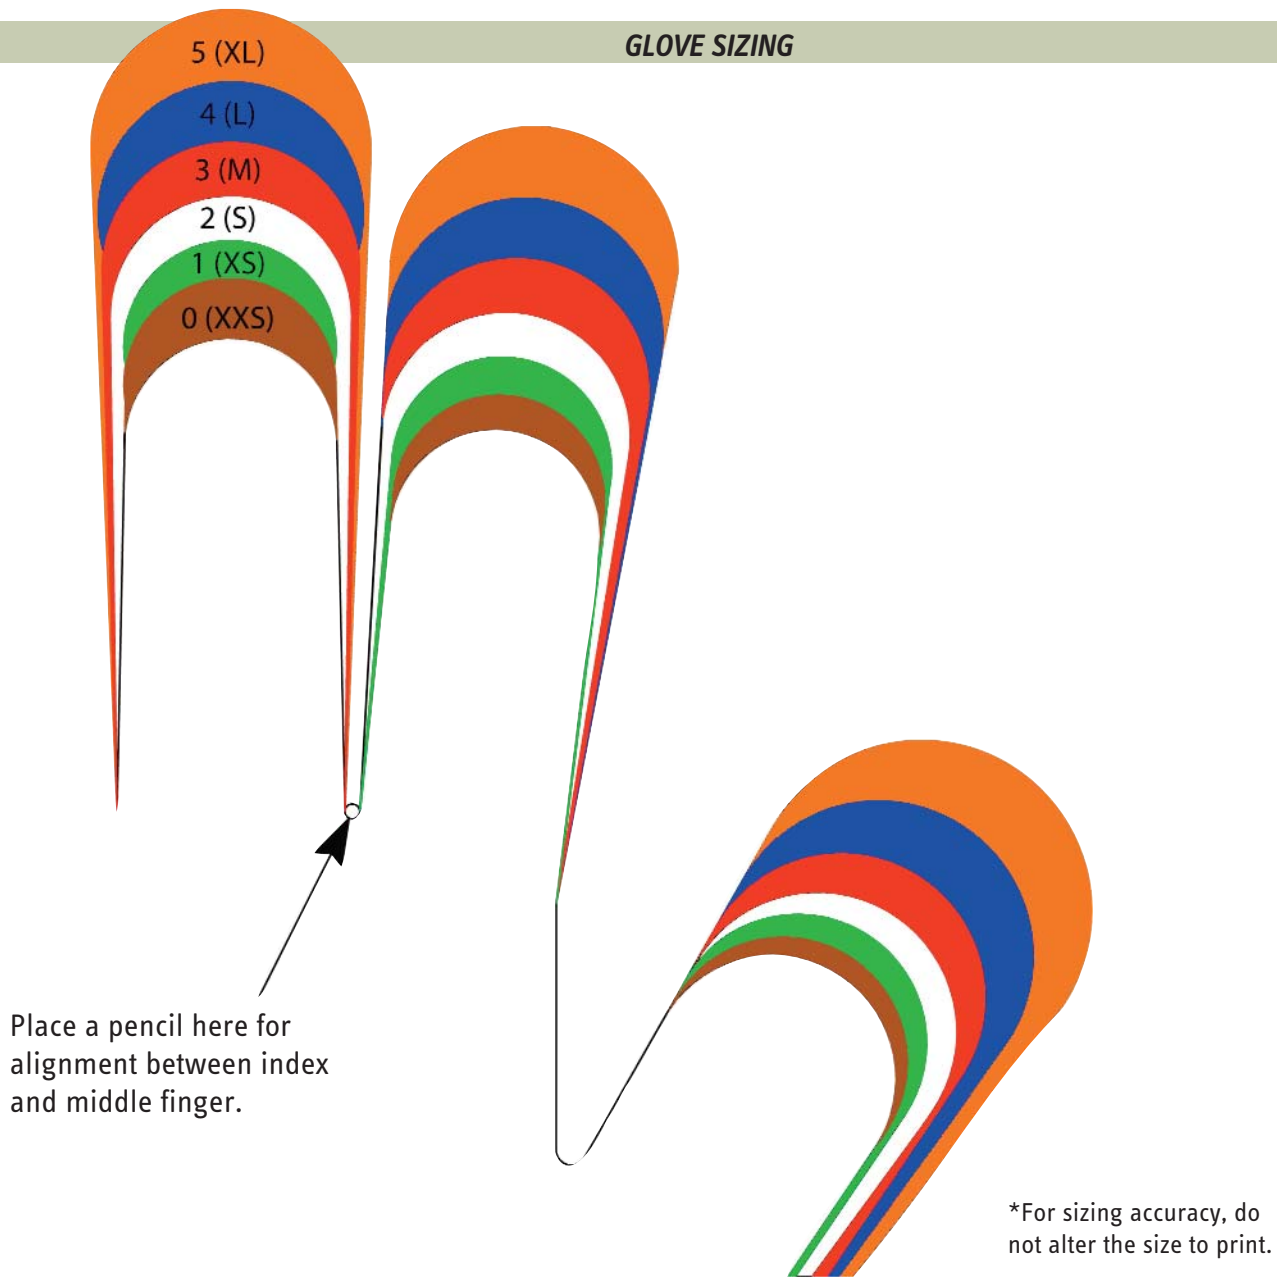

Place a pencil here for alignment between index and middle finger.

*For sizing accuracy, do not alter the size to print.

LAUNDERING INSTRUCTIONS

Metal mesh gloves and garments should be cleaned and sanitized at least once daily, particularly in food processing and food handling operations to comply with regulations governing these industries. Use a mild detergent in clean, warm water and vigorously scrub gloves to remove foreign matter. The gloves can also be laundered by machine washing, again using a mild detergent. Water temperature of 122° F (50° C) is recommended whether gloves are manually or machine washed. Gloves must be rinsed in clean, hot water, at least 180°F (82° C). Only disinfectants approved by food hygiene authorities should be used. Store in a cool, dry and well ventilated area. ***The practice of hitting gloves against work stations or hard surfaces of any kind to remove debris is specifically discouraged, as such repetitive action could damage the mesh.***

⚠️ WARNINGS

* Gloves are cut-resistant, not cut proof. Extreme caution should be used around moving machinery.

** Laundering gloves that have been in contact with toxic or corrosive chemicals may result in a chemical reaction, including fumes that could cause personal injury, serious illness or death.

This information is provided as a guideline for product use. The end user is solely responsible for determining the suitability of a particular glove for a specific application and the length of time in which such glove may be safely used.

Hand protection with a Perfect Fit

Sperian Protection Americas, Inc. | 900 Douglas Pike, Smithfield, RI 02917-1874 | tel: 1.800.430.5490 | fax: 1.800.322.1330