



# SPECIFICATION SHEET

## 16-318V



4342

### G-TEK® POLYKOR™ BLENDED GLOVE WITH POLYURETHANE COATED SMOOTH GRIP – 18 GAUGE

- Seamless construction offers increased comfort and breathability
- PolyKor™ shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Washable, resistant to chemicals, water, and ultraviolet light
- Vending machine packed (V), each pair of gloves is tri-folded and sealed in a poly bag

### APPLICATIONS

- Electronics
- Glass cutting
- Sheet metal handling
- General duty
- Parts assembly
- Sharp small parts handling

### CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)



### TECHNICAL DATA

MATERIAL	PolyKor™ Blended Liner					
COLOR	Liner: ■ Light Blue / Coating: ■ Blue					
CUFF STYLE	Knit wrist					
SIZES	XS - XXL					
PACKAGING	1 tri-folded pair per bag, 6 pair per pack, 12 packs per case					
CASE DIMENSIONS	11.8" x 12.6" x 13" / 30cm x 32cm x 33cm					
CASE WEIGHT	XS	S	M	L	XL	XXL
	5.7 lbs 2.6 kg	6 lbs 2.7 kg	6.4 lbs 2.9 kg	6.6 lbs 3 kg	7.1 lbs 3.2 kg	7.3 lbs 3.3 kg
COO	China					

### DIMENSIONS (in/cm)

	XS	S	M	L	XL	XXL
<b>A</b>	8.2 / 21	8.6 / 22	8.9 / 22.5	9.4 / 24	9.8 / 25	10.2 / 26
<b>B</b>	3.3 / 8.5	3.5 / 9	3.7 / 9.5	3.9 / 10	4.1 / 10.5	4.3 / 11
<b>H</b>	□ White	■ Green	■ Brown	■ Yellow	■ Gray	■ Black


### PERFORMANCE PROPERTIES

EN388: 4342 ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16)  
ASTM F1790-05 ANSI Cut Level 2

ABRASION	0	1	2	3	4	5
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5

### BARCODES

ITEM	BAG	DOZEN	CASE
■ 16-318V/XS	616314209420	01616314209429	02616314209428
■ 16-318V/S	616314209406	01616314209405	02616314209404
■ 16-318V/M	616314209390	01616314209399	02616314209398
■ 16-318V/L	616314209383	01616314209382	02616314209381
■ 16-318V/XL	616314209413	01616314209412	02616314209411
■ 16-318V/XXL	616314209437	01616314209436	02616314209435

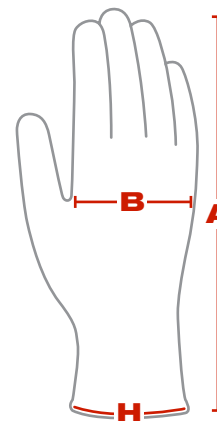

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.