



SPECIFICATION SHEET

305-3000



CLASS 3 ARC RATED FLAME RESISTANT SOLID VEST

- NFPA 70E, meets ASTM F1506
- PPE Level 1 with Arc Rating of 5.4 cal/cm²
- Solid GlenGuard® modacrylic fabric
- Hook and loop closure
- 2-inch FR Reflective Material Level 2
- To Be Worn Over Arc Rated Clothing Only. Not meant to be worn alone or over Non-Arc Resistant apparel

APPLICATIONS

- Construction
- Municipalities
- Work conditions that require high-visibility clothing be worn with flame or arc flash protection

CARE INSTRUCTIONS

Machine wash cold water, tumble dry low or hand dry. Do not iron, do not dry clean. Do not wash in biological powder, wash as synthetics. Maximum of 50 wash cycles.

When FR clothing is cleaned manufacturer instructions shall be followed to avoid loss of protection

TECHNICAL DATA

MATERIAL	Solid GlenGuard® modacrylic fabric
CONSTRUCTION	Main: 6.1 oz/yd ² 590 Wring Spun 95% Kanecron™ / 5% Twaron Acc: 3M FR Tape 8935, hook and loop closure
COLOR	■ Hi-Vis Lime Yellow
SIZES	M - 5X
PACKAGING	1/Polybag, 36/Case
CASE	19.7" x 14.6" x 13.8" / 50cm x 37cm x 35cm
CASE WEIGHT	26.0 lbs / 11.8 kg
COO	USA


BARCODES

ITEM	BAG	DOZEN	CASE
■ 305-3000/M	01616314078735	---	02616314078734
■ 305-3000/L	01616314078742	---	02616314078741
■ 305-3000/XL	01616314078759	---	02616314078758
■ 305-3000/2X	01616314078766	---	02616314078765
■ 305-3000/3X	01616314078773	---	02616314078772
■ 305-3000/4X	01616314078780	---	02616314078789
■ 305-3000/5X	01616314078797	---	02616314078796



DIMENSIONS (in/cm)

	M	L	XL	2X	3X	4X	5X
A	47.2/120	49.6/126	52/132	54.5/138	56.7/144	59/150	61.4/156
B	28/71.1	28/71.1	28/71.1	28/71.1	28/71.1	28/71.1	28/71.1

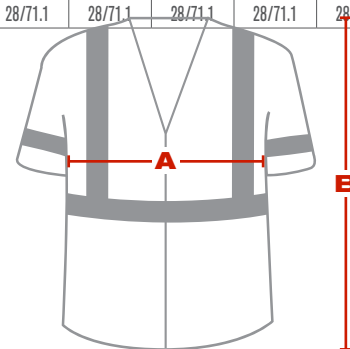

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

968 Albany Shaker Road | Latham, NY 12110 | 800-262-5755 | 518-861-0133 | Fax: 518-861-0144 | sales@pipusa.com | www.pipusa.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.