



SPECIFICATION SHEET

385-FRWS

8 CAL 7 OZ. DUAL-CERTIFIED WORKSHIRT

- 7 oz. 90% cotton / 10% nylon FR twill
- ARC rating: ATPV 8.5 cal/cm²
- Dual-certified to NFPA 70E and NFPA 2112-2012 standards
- HRC 2
- 2 chest pockets with pencil line in each; buttoned flap closure
- Bar-tacked at all stress points
- Aramid high-tenacity FR thread
- Melamine FR buttons, front closure, collar, cuffs and pockets

APPLICATIONS

- Exposed to flame and ARC flash risk

CARE INSTRUCTIONS

Washable and dry cleanable; Do not use soap; Do not use chlorine bleach; Wash in synthetic detergents; Machine Wash - Warm; Tumble Dry - Warm


TECHNICAL DATA

MATERIAL	90% Cotton / 10% Nylon
CONSTRUCTION	Aramid high tenacity FR thread All metal thermally protected from the skin Bar-tacked at all stress points Men's button down shirt collar Melamine buttons: 13mm: 2pcs on collar points 13mm: 2pcs on chest pockets, 4pcs on cuffs, 7pcs on front lacket, 1pc spare under placket
COLOR	■ Navy Blue, ■ Khaki
SIZES	S-4X
PACKAGING	1 per polybag; 30 per case
CASE	25" x 16.5" x 11.4" / 64cm x 42cm x 29cm
CASE WEIGHT	39.7lbs / 18kg
COO	China



DIMENSIONS (in/cm)

	S	M	L	XL	2X	3X	4X
A	42.5 / 107.2	46.5 / 118.1	50.5 / 128.3	54.5 / 138.4	58.5 / 148.59	62.5 / 158.75	66.5 / 168.9
B	30.5 / 77.5	31.5 / 80	32.5 / 82.5	33.5 / 85	34.5 / 87.6	35.5 / 90	36.5 / 92.7

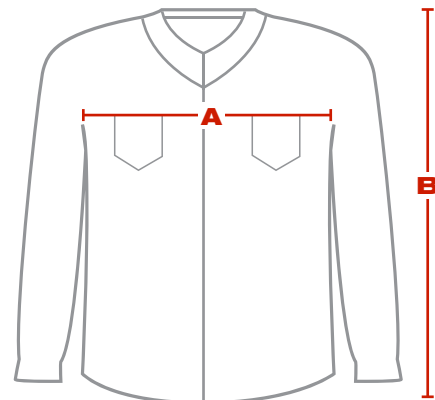

BARCODES

ITEM	EACH	BOX	CASE
■ 385-FRWS-NV/S	616314163784	01616314163783	02616314163782
■ 385-FRWS-NV/M	616314163791	01616314163790	02616314163799
■ 385-FRWS-NV/L	616314163807	01616314163806	02616314163805
■ 385-FRWS-NV/XL	616314163814	01616314163813	02616314163812
■ 385-FRWS-NV/2X	616314163821	01616314163820	02616314163829
■ 385-FRWS-NV/3X	616314163838	01616314163837	02616314163836
■ 385-FRWS-NV/4X	616314163845	01616314163844	02616314163843
■ 385-FRWS-KH/S	616314163708	01616314163707	02616314163706
■ 385-FRWS-KH/M	616314163715	01616314163714	02616314163713
■ 385-FRWS-KH/L	616314163722	01616314163721	02616314163720
■ 385-FRWS-KH/XL	616314163739	01616314163738	02616314163737
■ 385-FRWS-KH/2X	616314163746	01616314163745	02616314163744
■ 385-FRWS-KH/3X	616314163753	01616314163752	02616314163751
■ 385-FRWS-KH/4X	616314163760	01616314163769	02616314163768