



PROTECTIVE INDUSTRIAL PRODUCTS

63-338 Specification Sheet

DISPOSABLE NITRILE

PRODUCT DESCRIPTION:

Nitrile gloves, industrial grade, powdered, 8 mil, textured grip.

- Made from component materials which comply with Federal regulations for food contact. 21CFR, 170-199;
- Contains no natural rubber latex proteins;
- Ambidextrous;
- Economical puncture resistance with great comfort, dexterity and tactile sensitivity;
- Silicone free.

Applications:

A very versatile glove for use in a broad range of applications for light hand protection from liquids, chemicals and debris.

TECHNICAL DATA:

Material: Nitrile

Color: Blue

Available Sizes: S - XL

Packaging: 50 pcs per inner; 20 inners per carton (1,000 pcs)

Case Dimensions (cm): 63.5 X 24.9 X 28.0

(in): 10.4 x 10.0 x 14.5

Case Weight: (S) 16.0 lbs / 7.3 kg (L) 26.0 lbs / 11.8 kg

(M) 25.0 lbs / 11.3 kg (XL) 27.0 lbs / 12.2 kg

AQL Level: 4.0

Manufacturer Certifications: ISO 9002 certified

Country of Origin/Harmonization Code: Malaysia/4015.19.1010



DIMENSIONS:

Size Available	S	M	L	XL
Over Length (cm) ± 0.5 -A (in)	25.0 9.8	25.0 9.8	25.0 9.8	25.0 9.8
Palm Width (cm) ± 0.5 -B (in)	8.7 3.4	9.4 3.7	10.7 4.2	11.2 4.4

Palm Thickness 0.20 (+/- 0.02) mm

Cuff Thickness 0.13 (+/- 0.02) mm


Finger Tip Thickness 0.22 (+/- 0.02) mm

ELONGATION INFORMATION:

Before Aging		After Accelerated Aging	
Tensile Strength (minimum)	Elongation (minimum)	Tensile Strength (minimum)	Elongation (minimum)
(Mpa)	%	(Mpa)	%
14.0	650	14.0	400

BARCODE # DISPENSER BOX CASE

63-338/XL	616314011320	02616314011320
63-338/L	616314011313	02616314011313
63-338/M	616314011306	02616314011306
63-338/S	616314011290	02616314011290

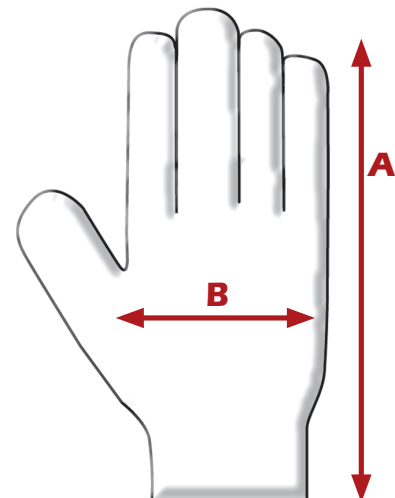

This document is the property of PIP and the information contained herein is proprietary to PIP.

Protective Industrial Products | 26 Computer Drive East | Albany, NY 12205
Phone: 518-861-0133 | Toll free: 800-262-5755 | Fax: 518-861-0144 | www.pipusa.com | sales@pipusa.com



PROTECTIVE INDUSTRIAL PRODUCTS

63-338 Specification Sheet

Permeation performance levels

Permeation defined - permeation is a process by which a chemical can pass through a protective barrier (e.g. glove) without going through visible openings, such as pores. Thus molecules of the chemical enter the barrier and "wriggle" through by passing between the molecules of the glove compound. In many cases the permeated material may appear unchanged to the human eye.

Permeation performance levels are assessed by measuring the time for a chemical to breakthrough the glove material. Samples, cut from the palms of the gloves are placed in a permeation cell which enables the chemical to be placed in contact with the outer surfaces of the gloves. Our CMIG laboratories are equipped with different measuring instruments to detect any chemical (e.g. solvents, acids, alkalis and salts) that has broken through to the inside surface of the glove sample.

The breakthrough time tests are carried out for up to eight hours, according to EN374.

Permeation performance level and breakthrough time

Level	x	0	1	2	3	4	5	6
Times	no test	< 10 mins	> 10 mins	> 30 mins	> 60 mins	> 120 mins	> 240 mins	> 480 mins

CHEMICAL	CAS #	PERMEATION BREAKTHROUGH	EN LEVEL
Acetone	67-64-1	NR.....	0
Benzene	71-43-2	NR.....	0
Butadiene	106-99-0	< 10 min	0
Ethylene Oxide	75-21-8	< 10 min	0
Methanol.....	67-56-1	NR.....	0
Propylene Oxide.....	75-56-9	NR.....	0
Styrene	100-42-5	NR.....	0
THF.....	109-99-9	< 5 min	0

NR = Not Recommended

** NOTE: This chemical resistant data is presented as a guide ONLY. This does not consider permeability of glove, chemical combinations, temperature, length of time that glove is in contact with the chemical and thickness of glove. These factors will alter or affect the performance of glove. Recommend actual on-the-job testing of glove.*

This document is the property of PIP and the information contained herein is proprietary to PIP.